



A KOHLER COMPANY

TRANQUILITY®


Features

- Compression molded from Sterling's exclusive solid Vikrell® material
- 1.25 hp pump with air switch and grounding-type plug-in cord
- Available in either a high gloss or swirl gloss finish
- 10 year consumer/3 year commercial limited warranty, pump motor assembly has 1 year limited warranty
- 6 Jets with independent variable control
- Lightly pebbled bottom surface for sure footing
- 60" (152.4 cm) x 43-1/2" (110.5 cm) x 18-1/8" (46 cm) complete unit rough-in dimensions include flange
- 60" (152.4 cm) x 42" (106.7 cm) x 18-1/8" (46 cm) finished dimensions

42" (106.7 cm) OVAL BATH WHIRLPOOL

66050100

ALSO 66051100, 76050100, 76051100

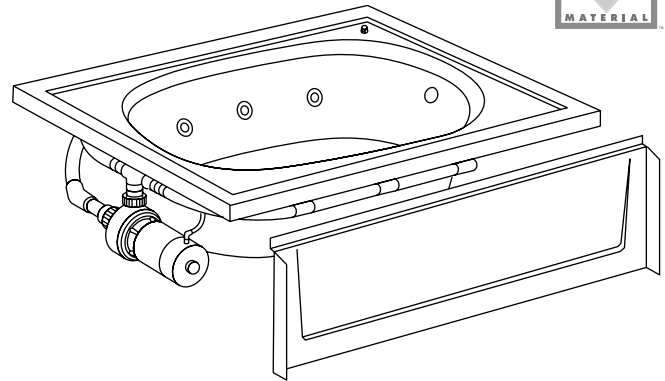

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7M
- IAPMO/UPC
- ANSI Z124.1.2
- Underwriters Laboratories (UL)
- HUD, UM Bulletin 73A

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
66050100	42" (106.7 cm) oval bath whirlpool, swirl gloss, with apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
66051100	42" (106.7 cm) oval bath whirlpool, swirl gloss, without apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
76050100	42" (106.7 cm) oval bath whirlpool, high gloss, with apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
76051100	42" (106.7 cm) oval bath whirlpool, high gloss, without apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Optional Accessories			
61058100	Apron, swirl gloss	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
71058100	Apron, high gloss	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

SterlingPlumbing.com

Visit us online for fixture color choices, detailed product information, color photos, installation instructions, care guides, and warranties. Sterling offers additional lines of plumbing products to complement the Sterling product you've chosen. Sign up for the Sterling monthly e-newsletter which showcases our latest product innovations. You may also call our Sterling Plumbing Answer Center from within the USA at 1-888-STERLING in addition to consulting with your local dealer. Sterling. Strong. Professional. Design.

TRANQUILITY®

Technical Information

Fixture*:	basin area	top area
Bathing well	42" (106.7 cm) x 23" (58.4 cm)	51" (129.5 cm) x 32-1/2" (82.6 cm)
To overflow	water depth	capacity
	11-1/4" (28.6 cm)	56 gal (212 L)
* Approximate measurements for comparison only.		

Pump:	Hp	V	Hz	A
1-speed	1-1/4	120	60	7

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump	120 V, 15 A, 60 Hz

Installation Notes

Install this product according to the installation guide.

Pump is supplied with a grounding-type plug-in cord. Locate the outlet behind the whirlpool, and within 24" (61 cm) of the pump.


Pump access opening is required.

Do not disassemble the pump or piping as this could void the warranty.

Size the drain cutout to fit the drain assembly that will be used.

Stud positioning is critical.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

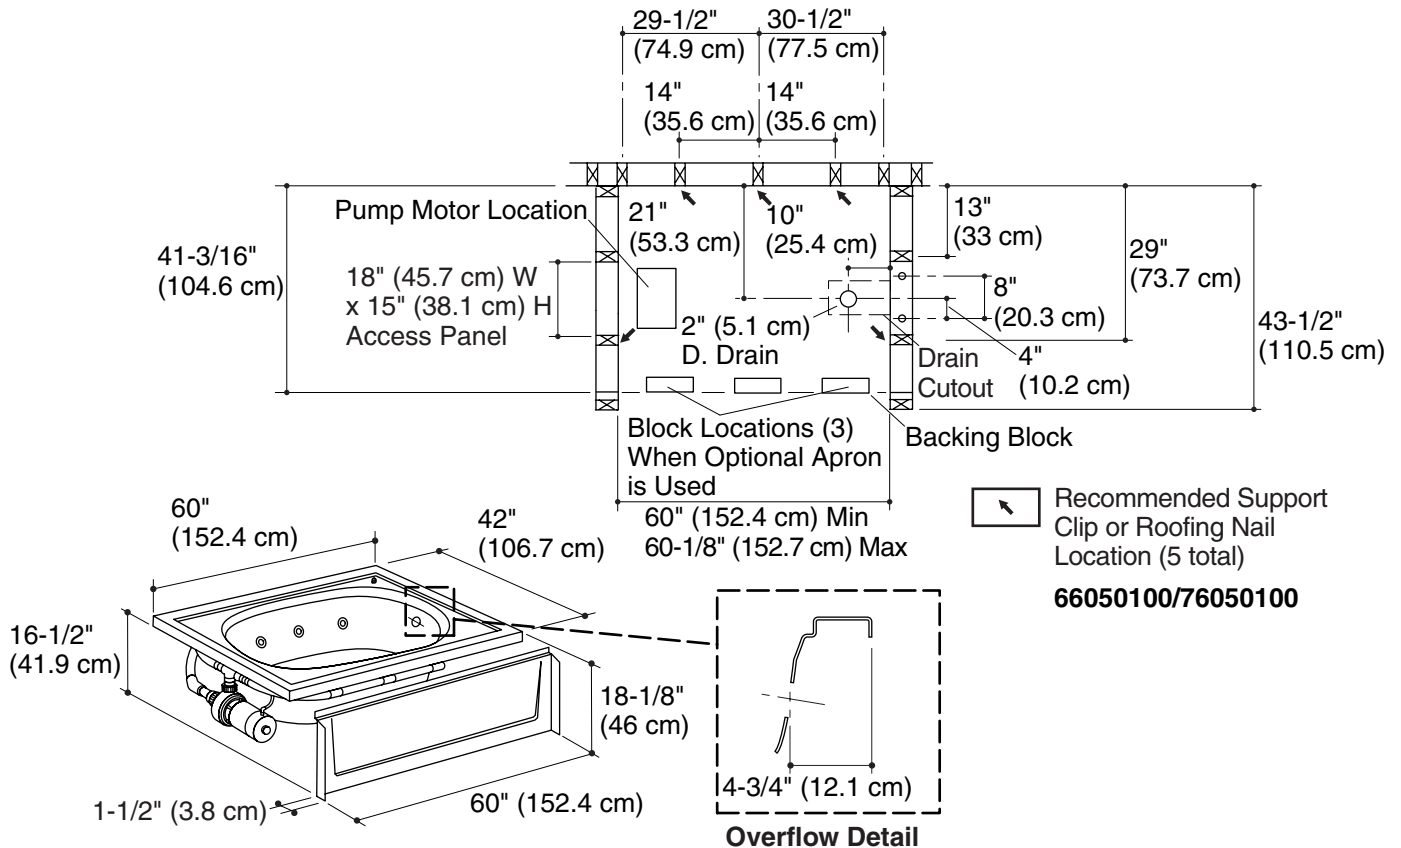

Product Diagram