




A KOHLER COMPANY

TRANQUILITY®

Features

- Compression molded from Sterling's exclusive solid Vikrell® material
- 1.25 hp pump with air switch and grounding-type plug-in cord
- Available in either a high gloss or swirl gloss finish
- 10 year consumer/3 year commercial limited warranty, pump motor assembly has 1 year limited warranty
- 6 Jets with independent variable control
- Lightly pebbled bottom surface for sure footing
- 60" (152.4 cm) x 43-1/2" (110.5 cm) x 18-1/8" (46 cm) unit rough-in dimension include flanges
- 60" (152.4 cm) x 42" (106.7 cm) x 18-1/8" (46 cm) complete unit finished dimensions

42" (106.7 cm) OVAL BATH WHIRLPOOL WITH CUSTOM PUMP
66050101
ALSO 66051101, 76050101, 76051101

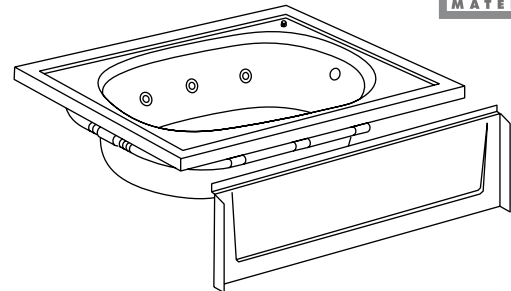

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- Underwriters Laboratories (UL)
- HUD, UM Bulletin 73A
- ASME A112.19.7M
- IAPMO/UPC

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
66050101	42" (106.7 cm) oval bath whirlpool, swirl gloss, with apron, with drain-end pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
66051101	42" (106.7 cm) oval bath whirlpool, swirl gloss, without apron, with drain-end pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
76050101	42" (106.7 cm) oval bath whirlpool, high gloss, with apron, with drain-end pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
76051101	42" (106.7 cm) oval bath whirlpool, high gloss, without apron, with drain-end pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

SterlingPlumbing.com

Visit us online for fixture color choices, detailed product information, color photos, installation instructions, care guides, and warranties. Sterling offers additional lines of plumbing products to complement the Sterling product you've chosen. Sign up for the Sterling monthly e-newsletter which showcases our latest product innovations. You may also call our Sterling Plumbing Answer Center from within the USA at 1-888-STERLING in addition to consulting with your local dealer. Sterling. Strong. Professional. Design.

TRANQUILITY®

Technical Information

Fixture*:	basin area	top area
Bathing well	42" (106.7 cm) x 23" (58.4 cm)	51" (129.5 cm) x 32-1/2" (82.6 cm)
To overflow	water depth	capacity
	11-1/4" (28.6 cm)	56 gal (212 L)
* Approximate measurements for comparison only.		

Pump:	Hp	V	Hz	A
1-speed	1-1/4	120	60	7

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump	120 V, 15 A, 60 Hz

Installation Notes

Install this product according to the installation guide.


Pump is supplied with a grounding-type plug-in cord. Locate the outlet within 24" (61 cm) of the pump.

Pump service access is required.

Size the drain cutout to fit the drain assembly that will be used.

Stud positioning is critical.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

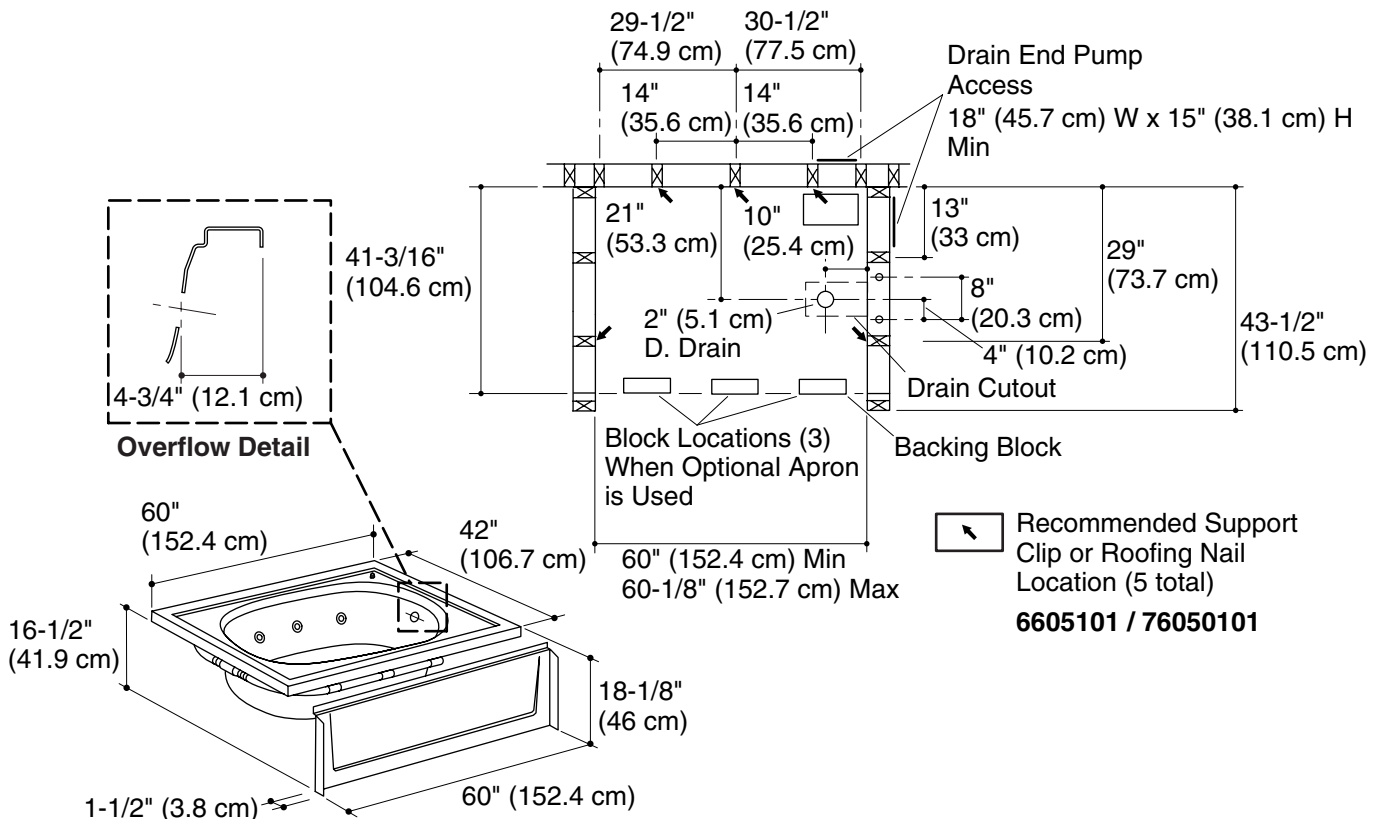

Product Diagram