



STRONG. PROFESSIONAL. DESIGN.™  
S P E C I F I C A T I O N S


**Bath Classics™**  
**Single Control Lavatory Faucets**  
Models 4212, 4222, 4229, 4222G,  
4229G, 4232, 4242,  
4249, 4242G, 4249G

**Standard Features**

- Minimum working input water pressure .....20 psi
- Maximum operating input water pressure .....80 psi
- Maximum pressure .....125 psi
- Maximum flow rate ..2.0 gpm at 60 psi (see chart)
- Valve type.....single control cartridge
- Installation requirements .....2 sink holes  
Minimum 1-1/8" Dia. In-line, 4" centers
- Pop-Up.....Plastic
- Supply Connectors ..Non-metallic Shanks

**Standards and Ratings**

- ASME A112.18.1M American Society of Mechanical Engineers Standard: "Plumbing Fixtures Fittings"

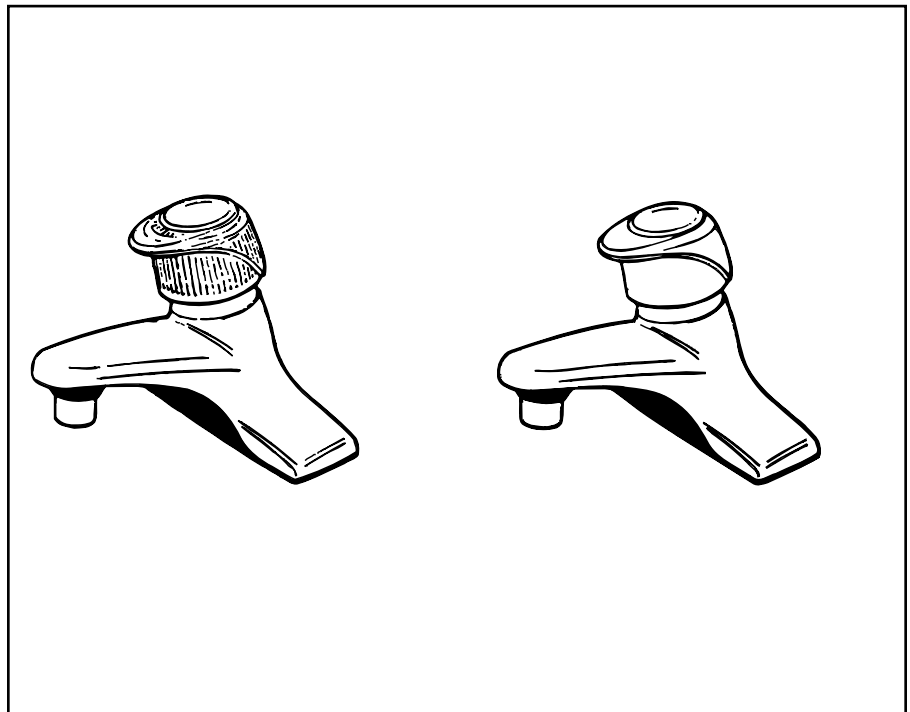

**Optional Features**

- Acrylic Handle
- Metal Tone Handle
- Chrome Finish
- Polished Brass Finish

**Features**

**Benefits**

**Chrome plated or polished brass finish**

Durable and easy to clean.

**Choice of acrylic or metal tone handle**

Easy operation and unique style coordinates with traditional or contemporary decor.


**Washerless cartridge**

Proven drip-free performance and easy repair and maintenance.


# Bath Classics™ Single Control Lavatory Faucets

D I M E N S I O N S

Models 4212, 4222, 4229, 4222G,  
4229G, 4232, 4242,  
4249, 4242G, 4249G

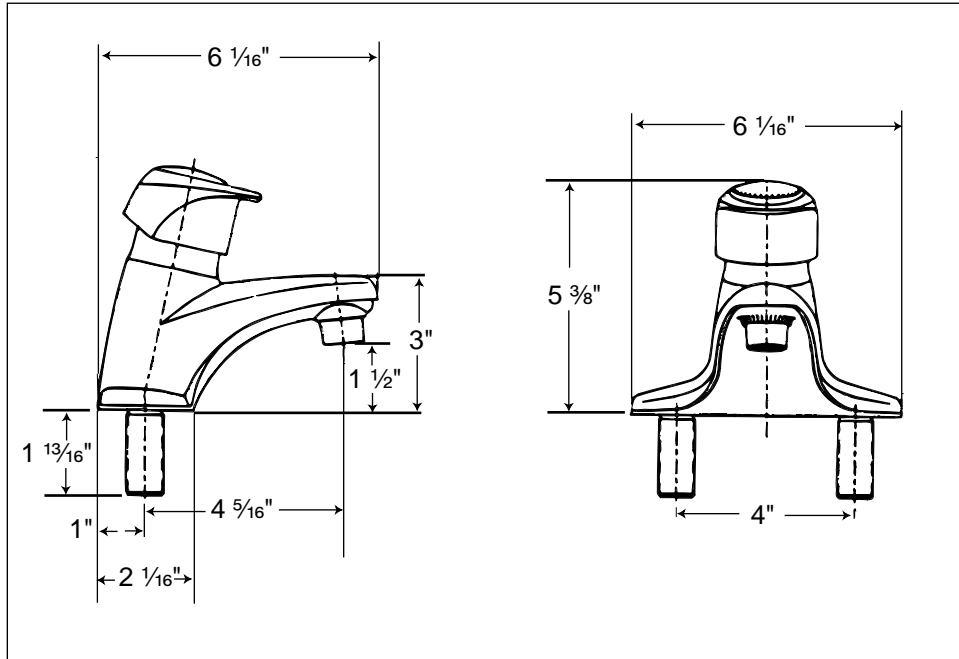

## FLOWRATE (gpm)

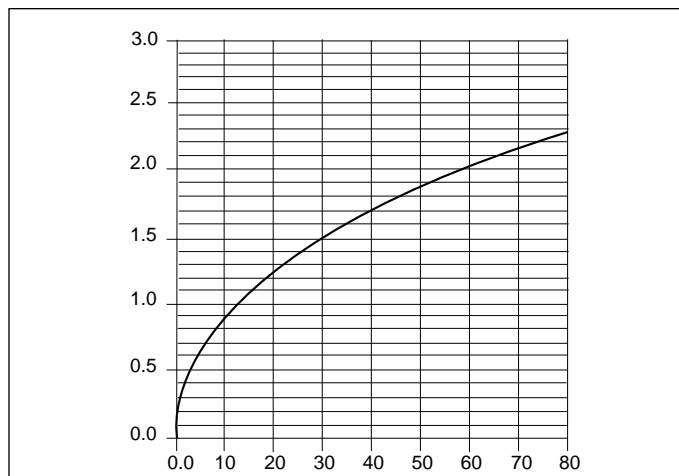

LINE PRESSURE  
P.S.I. GAUGE

**STERLING**

STRONG. PROFESSIONAL. DESIGN.™